

HIW716MAG

MAG Series - Machined Aluminum, Gerotor Design

The new BURNDY low pressure hydraulic impact wrench MAG Series (Machined Aluminum, Gerotor) is specifically designed for linemen and contractors needing power, reliability and enhanced ergonomics.



SPECIFICATIONS

Chuck Type:	7/16" Tri-ball Quick Chuck
Opt. Pressure:	1,000 - 2,250 PSI
Flow Range:	4 - 12 GPM
Opt. Flow Range:	4 - 8 GPM
Weight:	7.6 lbs
Torque:	550 ft-lbs
Height:	9.6"
Width:	3.6"
Length:	9.0"

Features & Benefits


- Aircraft grade extruded aluminum body and forged handle
- CNC machined parts
- Frictionless gerotor motor
- BURNDY 5-year limited warranty
- Injection molded replaceable comfort grips
- Glove-sized handle and activation trigger

Features & Benefits (continued)

- Reduced handle-to-trigger distance
- Over 550 ft-lbs of torque @ 2000 psi & 5 gpm
- Reverse flow and hook-up prevention
- Dual spool selector for Open and Closed Center use
- Pressure relief valve
- Cartridge style valve

Accessories

LPHTADPMM71612
7/16" Quick Chuck to 1/2" Square Drive adaptor
LPHTADPMMOP66 (2 required)
SAE #6 to 3/8" NPT male-to-male adaptor
LPHTHTMANOSE66
3/8" Male Coupler (flat face) with 3/8" NPT (female thread)
LPHTHTMABODY66
3/8" Female Coupler (flat face) with 3/8" NPT (female thread)
LPHTHOSNCR66668
8', 3/8" NPT, 3/8" NPT Non-Conductive Hose
LPHTADPSMOP66 (2 required)
SAE swivel

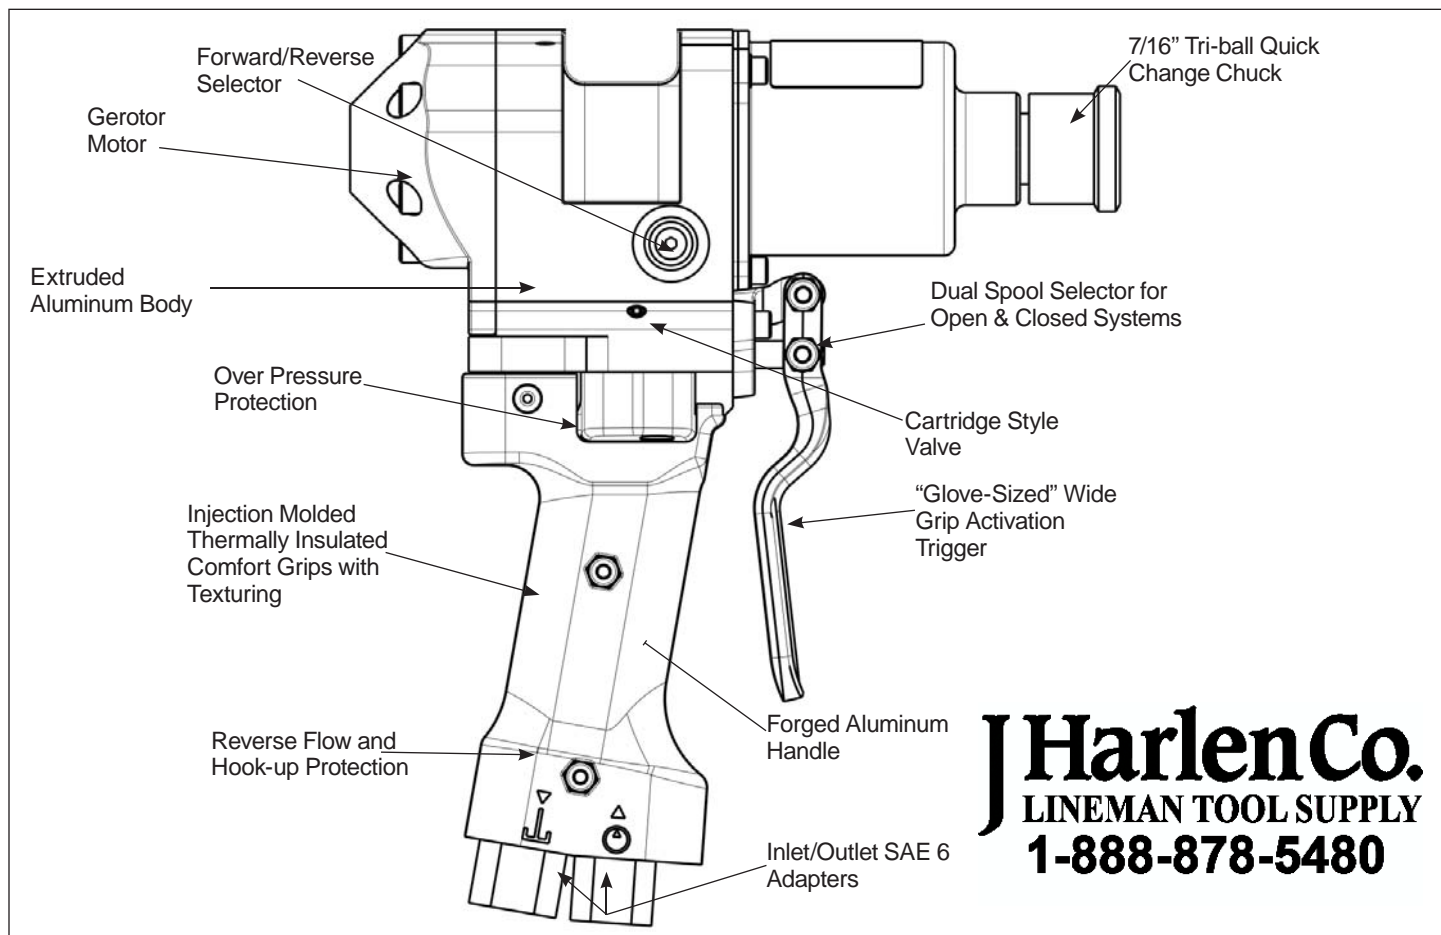

J Harlen Co.
LINEMAN TOOL SUPPLY
1-888-878-5480

Blue highlighted items are industry standard and most frequently ordered.